


Horizontal Pump 12/10 M

Excellent
Minerals
Solutions



CURVE SHOWS APPROXIMATE PERFORMANCE FOR CLEAR WATER (International Test Standard ISO9906:1999 - Grade 2 unless otherwise specified). For media other than water, corrections must be made for density, viscosity and/or other effects of solids. WEIR MINERALS reserves the right to change pump performance and/or delete impellers without notice. Frame suitability must be checked for each duty and drive arrangement. Not all frame alternatives are necessarily available from each manufacturing centre.

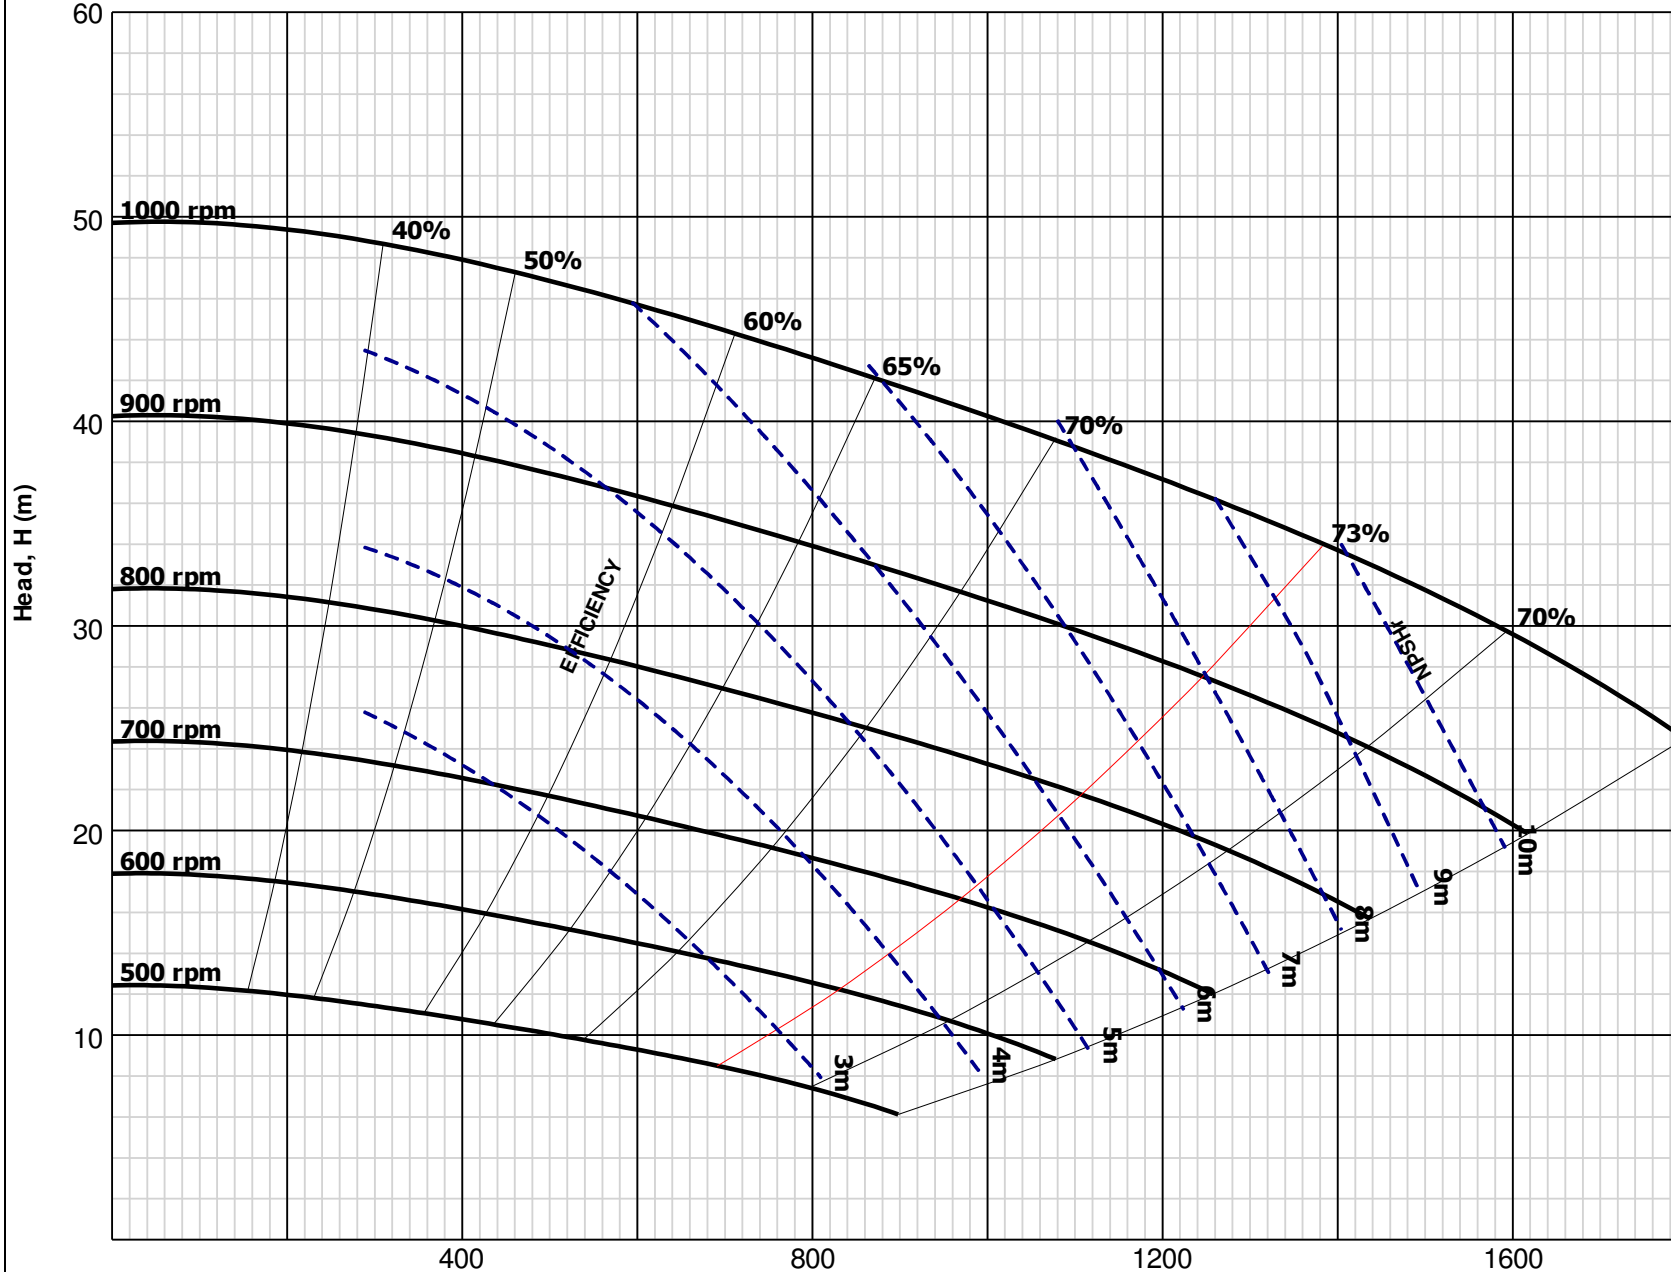

Pump

Discharge	254mm
Suction	305mm

Impeller

Vanes	5
Vane ø	549mm
Type	Closed
Part No	Material
F10147	Metal

Frame (Rating - KW)

E	120
EE	225
F	260
R	300
FF	425
FFX	425

Seal

Gland Sealed Pump

Liner (Norm Max r/min)

Polymer	900
Metal	1100

Curve

Revision	1
Revision Notes	NEW TESTED PERFORMANCE Reference
TEST 44:	A4-P-1764-7, 1796-8
Issued	Sep 88

© 5/2009 Weir Minerals Australia
All Rights Reserved

TYPICAL PUMP PERFORMANCE CURVE

WPA1210B01/1