


STUART PUMPS LTD

Stuart House, Crows Hall Lane,
Attleborough, Norwich NR17 1AD
Telephone 44 (0) 1953 454540
Fax 44 (0) 1953 456968

Auto Prime Pumps

150M-60 x TR3

CURVE AP-7
ISSUE 2

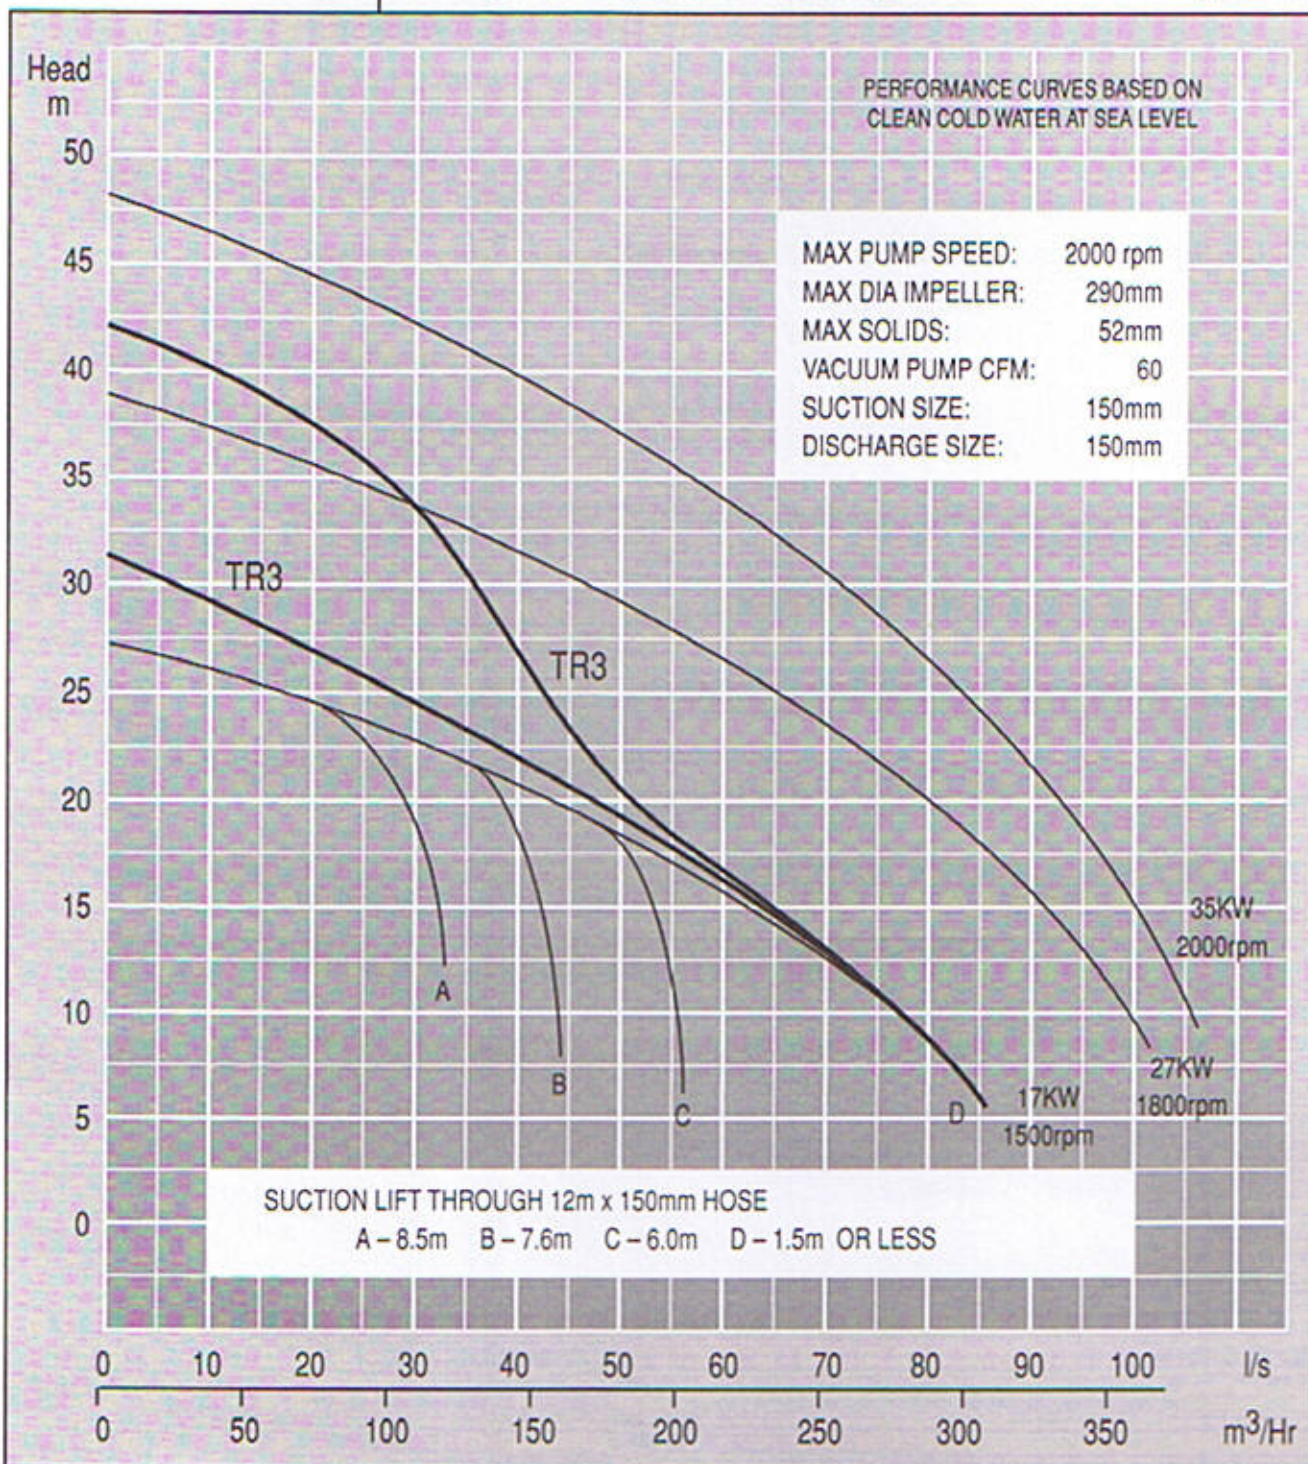

Volute	Angle discharge, Horizontal suction. Cast Iron.	NRV	Ball type polyurethane with reversible seat.
Impeller	2 vane Open. Cast Iron.	Priming	Continuous with mechanical and pressure differential control.
Wear Plate	SNG Cast Iron.	Air Handling	Oil lubricated rotary vacuum pump.
Pump Shaft	Steel (BS970 EN8B).	Chassis	Box steel section combining a 122 litre fuel tank. 25 Hours running time.
Bearings	DE: Twin Taper Roller NDE: Cylindrical Roller. L ₁₀ Life: 40,000 hrs at 2000rpm (BEP).	Wheels	Four solid rubber or two pneumatic or two road trailer.
Shaft Seal	Semi-mechanical. Replaceable on site.	150M-60 x TR3 without Towbar (cm)	212 x 146 x 160. 950 kg.
		150M-60 Pump End (cm)	110 x 82 x 120. 474 kg.

Our policy is one of continuous improvement and we reserve the right to alter specifications without giving notice.