www.FGWilson.com

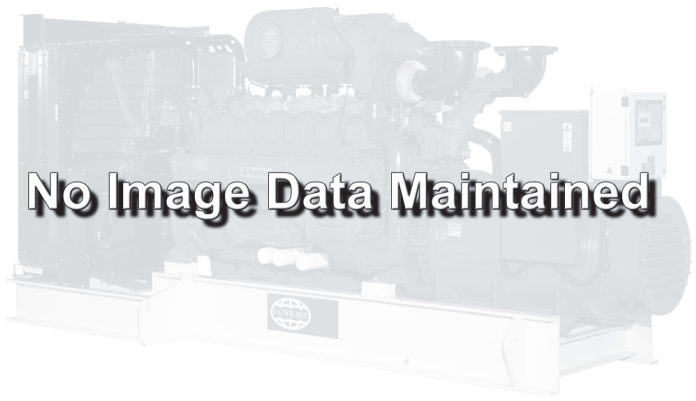

P300-3

Image for illustration purposes only.

Output Ratings

Voltage, Frequency	Prime	Standby
400V, 50 Hz	275.0 kVA / 220.0 kW	300.0 kVA / 240.0 kW
	- / -	- / -

Ratings at 0.8 power factor.

Please refer to the output ratings technical data section for specific generator set outputs per voltage.

Prime Rating
These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.

Standby Rating
These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings. The alternator on this model is peak continuous rated (as defined in ISO 8528-3).

Standard Reference Conditions
Note: Standard reference conditions 25°C (77°F) Air Inlet Temp, 100m (328 ft) A.S.L. 30% relative humidity.
Fuel consumption data at full load with diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, Class A2.

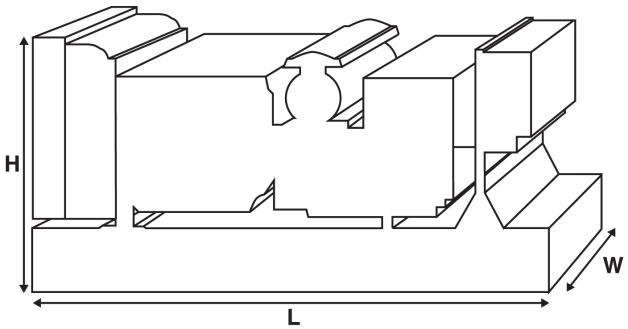

Ratings and Performance Data

Engine Make & Model:		Perkins® 1506A-E88TAG4	
Alternator manufactured for FG Wilson by:		Leroy Somer	
Alternator Model:		LL5014J	
Control Panel:		PowerWizard 1.1+	
Base Frame:		Heavy Duty Fabricated Steel	
Circuit Breaker Type:		3 Pole MCCB	
Frequency:		**50 Hz**	**60 Hz**
Engine Speed: rpm		1500	-
Fuel Tank Capacity: litres (US gal)		587 (155.1)	
Fuel Consumption: l/hr (US gal/hr)			
(100% Load)	**- Prime**	58.1 (15.3)	-
	- Standby	63.1 (16.7)	-

Available Options

FG Wilson offer a range of optional features to tailor our generator sets to meet your power needs. Options include:

- Upgrade to CE Certification
- A wide range of Sound Attenuated Enclosures
- A variety of generator set control and synchronising panels
- Additional alarms and shutdowns
- A selection of exhaust silencer noise levels

For further information on all of the standard and optional features accompanying this product please contact your local Dealer or visit: www.FGWilson.com

Dimensions and Weights

Length (L) mm (in)	**Width** (W) mm (in)	**Height** (H) mm (in)	**Dry** kg (lb)	**Wet** kg (lb)
3300 (129.9)	1100 (43.3)	1771 (69.7)	2390 (5269)	2426 (5348)

Dry = With Lube Oil Wet = With Lube Oil and Coolant

Ratings in accordance with ISO 8528, ISO 3046, IEC 60034, BS5000 and NEMA MG-1.22.
Generator set pictured may include optional accessories.

Engine Technical Data	
No. of Cylinders / Alignment:	6 / In Line
Cycle:	4 Stroke
Bore / Stroke: mm (in)	112.0 (4.4)/149.0 (5.9)
Induction:	Turbocharged Air To Air Charge Cooled
Cooling Method:	Water
Governing Type:	Electronic
Governing Class:	ISO 8528 G2
Compression Ratio:	16.1:1
Displacement: l (cu. in)	8.8 (537.0)
Moment of Inertia: kg m² (lb/in²)	2.40 (8212)
Engine Electrical System:	
- Voltage / Ground	24/Negative
- Battery Charger Amps	45
Weight: kg (lb) **- Dry**	778 (1715)
- Wet	800 (1764)

Performance	50 Hz	60 Hz
Engine Speed: rpm	1500	-
Gross Engine Power: kW (hp)		
- Prime	258.0 (346.0)	-
- Standby	281.0 (377.0)	-
BMEP: kPa (psi)		
- Prime	2344.0 (339.9)	-
- Standby	2552.0 (370.2)	-

Fuel System	
Fuel Filter Type:	Replaceable Element
Recommended Fuel:	Class A2 Diesel or BSEN590

Fuel Consumption: l/hr (US gal/hr)

Prime	110% Load	100% Load	75% Load	50% Load
50 Hz	63.4 (16.7)	58.1 (15.3)	44.1 (11.6)	31.5 (8.3)
60 Hz	-	-	-	-

Standby	100% Load	75% Load	50% Load
50 Hz	63.1 (16.7)	47.6 (12.6)	33.9 (9.0)
60 Hz	-	-	-

(Based on diesel fuel with a specific gravity of 0.85 and conforming to BS2869, Class A2)

Air Systems	50 Hz	60 Hz
Air Filter Type:	Paper Element	
Combustion Air Flow: m³/min (cfm)		
- Prime	15.1 (533)	-
- Standby	16.4 (579)	-
Max. Combustion Air Intake Restriction: kPa (in H_2O)	6.2 (24.9)	-

Cooling System	50 Hz	60 Hz
Cooling System Capacity: l (US gal)	36.0 (9.5)	-
Water Pump Type:	Centrifugal	
Heat Rejected to Water & Lube Oil:		
kW (Btu/min) **- Prime**	113.0 (6426)	-
- Standby	115.0 (6540)	-
Heat Radiation to Room: Heat radiated from engine and alternator		
kW (Btu/min) **- Prime**	31.3 (1780)	
- Standby	33.5 (1905)	
Radiator Fan Load: kW (hp)	7.7 (10.3)	-
Radiator Cooling Airflow: m³/min (cfm)	7.3 (258)	-
External Restriction to Cooling Airflow: Pa (in H_2O)	125 (0.5)	-

Designed to operate in ambient conditions up to 50°C (122°F).
Contact your local FG Wilson Dealer for power ratings at specific site conditions.

Lubrication System	
Oil Filter Type:	Spin-On, Full Flow
Total Oil Capacity: l (US gal)	39.0 (10.3)
Oil Pan: l (US gal)	36.0 (9.5)
Oil Type:	API CI-4 0W-30
Oil Cooling Method:	Water

Exhaust System	50 Hz	60 Hz
Maximum Allowable Back Pressure: kPa (in Hg)	10.0 (3.0)	-
Exhaust Gas Flow: m³/min (cfm)		
- Prime	41.5 (1466)	-
- Standby	46.3 (1635)	-
Exhaust Gas Temperature: °C (°F)		
- Prime	574 (1065)	-
- Standby	576 (1069)	-

Alternator Physical Data	
Manufactured for FG Wilson by:	Leroy Somer
Model:	LL5014J
No. of Bearings:	1
Insulation Class:	H
Winding Pitch Code:	2/3 - 6
Wires:	12
Ingress Protection Rating:	IP23
Excitation System:	SHUNT
AVR Model:	R250

Alternator Operating Data	
Overspeed: rpm	2250
Voltage Regulation: (Steady state)	+/- 0.5%
Wave Form NEMA = TIF:	50
Wave Form IEC = THF:	2.0%
Total Harmonic content LL/LN:	4.0%
Radiant Heat: kW (Btu/min)	
- 50 Hz	18.5 (1052)
- 60 Hz	-

Alternator Performance Data:	50 Hz			60 Hz
Data Item	415/240V	400/230V 230/115V 230 V	380/220V	
Motor Starting Capability* kVA	623	586	536	
Short Circuit Capacity %**	300	300	300	
Reactances: Per Unit				
Xd	2.691	2.896	3.209	
X'd	0.123	0.133	0.147	
X"d	0.073	0.079	0.088	

Reactances shown are applicable to prime ratings.
*Based on 30% voltage dip at 0.6 power factor and SHUNT excitation.
**With optional permanent magnet generator or AREP excitation.

Output Ratings Technical Data 50 Hz				
Voltage	**Prime:**		**Standby:**	
	kVA	**kW**	**kVA**	**kW**
415/240V	275.0	220.0	300.0	240.0
400/230V	275.0	220.0	300.0	240.0
380/220V	275.0	220.0	300.0	240.0
230/115V	275.0	220.0	300.0	240.0
230 V	275.0	220.0	300.0	240.0

Output Ratings Technical Data 60 Hz				
Voltage	**Prime:**		**Standby:**	
	kVA	**kW**	**kVA**	**kW**

General Information

Documentation

A full set of operation and maintenance manuals and circuit wiring diagrams.

Generator Set Standards

The equipment meets the following standards: BS5000, ISO 8528, ISO 3046, IEC 60034, NEMA MG-1.22.

FG Wilson is a fully accredited ISO 9001 company.

Warranty

All prime equipment carries a one year manufacturer's warranty. Standby equipment, limited to 500 running hours per year, has a two year manufacturer's warranty. For details on warranty cover please contact your local Dealer, or visit our website: FGWilson.com.

Dealer contact details:

FG Wilson manufactures product in the following locations:

Northern Ireland • Brazil • China • India • USA

With headquarters in Northern Ireland, FG Wilson operates through a Global Dealer Network.
To contact your local Sales Office please visit the FG Wilson website at www.FGWilson.com.

FG Wilson is a trading name of Caterpillar (NI) Limited.

In line with our policy of continuous product development, we reserve the right to change specification without notice.