

ENM • ENT




BI-DIRECTIONAL FLOW

- Industry
- Hire fleets
- Red diesel
- Seawater
- Chemicals
- Light oils



ENM pumps are self-priming and have bronze bodies and single impellers. They have 316 stainless steel shafts, fitted with NBR lip seals (Viton® is available at extra cost). The IP44 motors have a forward and reverse switch for filling and emptying duties. They are also available in 3 phase as ENT pumps. They are designed mainly for pumping clean liquids at temperatures up to a maximum of 90°C, but can also handle very small soft solids, in suspension. Maximum recommended suction lift, with a foot valve, is 6 metres.



These are good, general-purpose, portable pumps for circulating and transfer of water, sea-water, juices, gas oil ("red diesel"), bio-fuel, transformer oil and mild chemicals. However, THEY MUST NOT PUMP DERV ("white diesel"), petrol, solvents or products with a low flash point. All models are supplied free-standing, so for ease of handling and added protection, a full frame is a worthy investment as an optional extra.

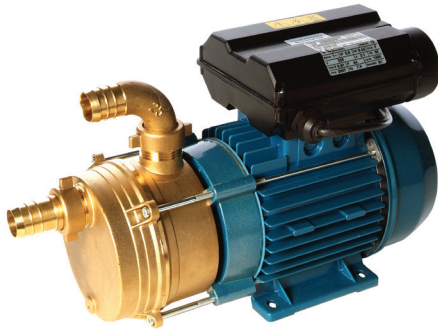

ENM25



ENM25 in frame

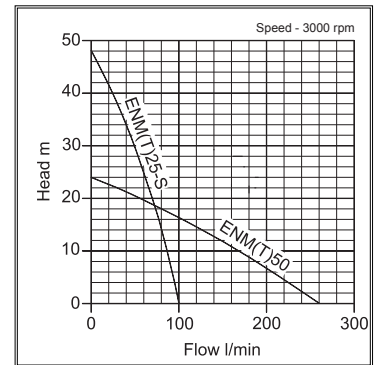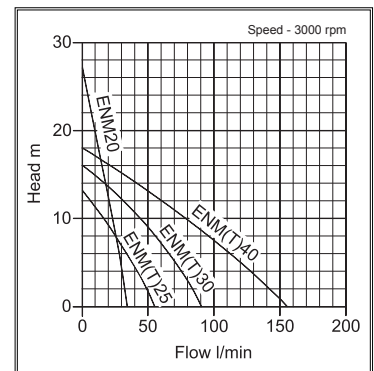

item code	model	inlet (mm)	outlet (mm)	kW	volt	flow (l/min)	head (mtrs)	w x l x h (mm)	dry weight (kgs)	
12-15-1004	ENM20	20	20	0.37	110	35	27	120x248x190	5.90	
12-15-1022	ENM20	20	20	0.37	230	35	27	120x248x190	5.90	
12-15-1003	ENM25	25	25	0.45	110	55	13	141x318x190	9.00	
12-15-1008	ENM25	25	25	0.45	230	55	13	141x318x190	9.00	
12-15-1017	ENT25	25	25	0.45	400	55	13	141x318x190	9.00	
12-15-1002	ENM30	30	30	0.75	110	90	16	162x376x209	11.90	
12-15-1020	ENM30	30	30	0.75	230	90	16	162x376x209	11.90	
12-15-1015	ENT30	30	30	0.75	400	90	16	162x376x209	11.90	
12-15-1013	ENM40	40	40	0.90	110	155	18	162x376x209	13.80	
12-15-1019	ENM40	40	40	0.90	230	155	18	162x376x209	13.80	
12-15-1007	ENT40	40	40	0.90	400	155	18	162x376x209	13.80	
12-15-1014	ENM50	50	50	1.50	230	260	24	202x431x236	20.70	
12-15-1012	ENT50	50	50	1.50	400	260	24	202x431x236	20.70	
12-15-1000	ENM25-S	25	25	1.50	110	100	48	202x355x236	15.30	
12-15-1021	ENM25-S	25	25	1.50	230	100	48	202x355x236	15.30	
12-15-1023	ENT25-S	25	25	1.50	400	100	48	202x355x236	15.30	
12-85-1067	Optional extra: full protection frame (type: FR001)...to fit models 20 & 25.								250x310x270	3.20
12-85-1060	Optional extra: full protection frame (type: FR002)...to fit models 30, 40, 50 & 25S.								295x375x300	3.90